

MANISCOPIC

MT 1740
SLT & SLT ULTRA



- Maximum lifting height : 16.65 m
- Nominal capacity :
4000 kg at 500 mm
- Maximum forward reach : 12.35 m
- Torque convertor
- 4 wheel drive - 4 wheel steer
- Hydraulic stabilizers
- Frame levelling



MANITOU

MT 1740 SLT/SLT ULTRA



Lift capacity4000 kg
at 500 mm from forks heels.
Tipping load at maximum reach
with stabilizers957 kg
Tear out force with bucket
as per ISO 83137000 daN



Lift height16.65 m
Times : unladen / loaded (in s)
Lifting15/16
Lowering10/9
Extension 1st and 2nd booms21.8/24.4
Extension 3rd boom (with stabilisers only) ..10.4/11.5
Retraction 1st and 2nd booms17.7/17.4
Retraction 3rd boom (with stabilisers only)9.7/8.7
Time unladen (in s)
Crowd5.3
Dump8.4



Tyres
440/80-24



Forks (mm)
Length1200
Width x thickness125 x 50
Maximum distance between forks1040
Carriage rotation124°



**Multidisc brakes - hydraulically assisted
on both axes**



PERKINS Engine Turbo
Type1104C- 44 Turbo
Capacity4 cylindres 4400 cm³
Power (ISO/TR 14396) :
at 2200 tr/mn100 HP/74.5 kw
Maximum torque (ISO/TR 14396) ..412 Nm at 1400 r.p.m.
Direct Injection
Water Cooling



TransmissionTorque convertor
Electro-hydraulic reversing shift
4 gears forward and reverse
Maximum travel speed25 km/h



Hydraulics
Gear type260 bars/196 l/mn
Flow divider with priority to steering and brakes








Capacities
Cooling system18.5 l.
Engine oil11 l.
Hydraulic oil175 l.
Transmission oil16 l.
Fuel tank135 l.



Weight unladen (with forks)11220 kg
Overall width2.42 m
Overall height2.60 m
Turning radius (outside wheels)4.17 m
Overall length5.98 m
Ground clearance0.48 m
Drawbar pull (unladen)9700 daN

Under
EN 1459
annexe B

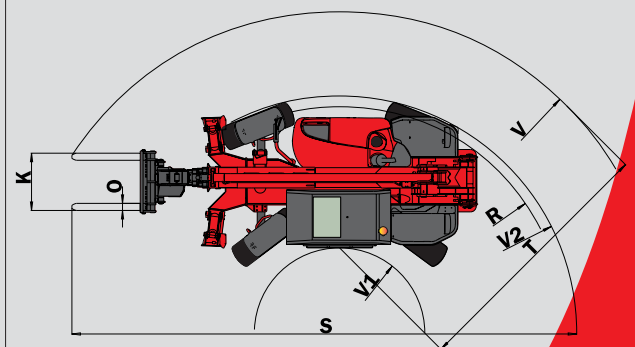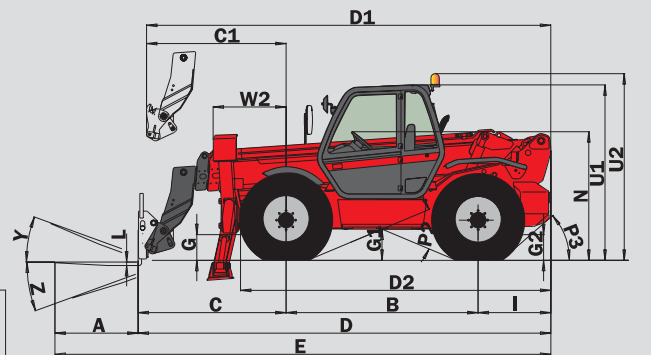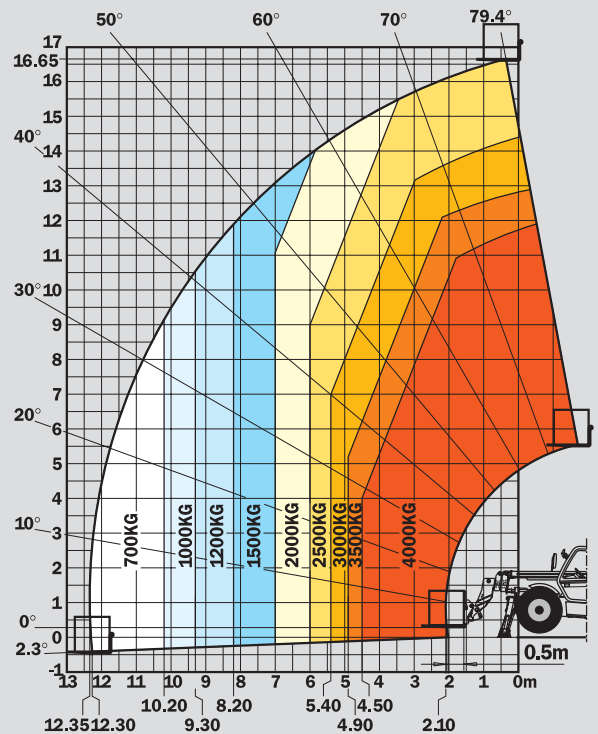

A	1200
B	2770
C	2160
C1	2232
D	5980
D1	6052
D2	4435
E	7180
F	1990
F1	1990
G	480
G1	475
G2	480
G3	290
H	7°
H1	7°
I	1050
J	950
K	1040
L	50
N	1880
O	125
P2	45,5°
P3	50°
R	3950
S	8912
T	4239
U1	2605
U2	2785
V	5709
V1	1470
V2	4168
W	2425
W1	3820
W2	1050
W3	2350
Y	12°
Z	112°

mm



This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice.
The MANITOU models presented in this brochure can be supplied complete with optional equipment attachments.
PATENTS FR 93 14367 - EP 0 656 315 US PENDING

MANITOU BF SA

B.P. 249 - 44158 Ancenis Cedex - France
Tél. : 33 2 40 09 10 11 / Export Department Fax : 33 2 40 09 10 97
www.manitou.com

700031EN - BE 146/Ind. A

