

Self-propelled vertical mast

- Compact dimensions
- Light weight
- Extended working area
- Inside and outside use



80 VJR

 **Working height**7.70 m
Platform height.....5.70 m
Outreach.....3.25 m

 **Platform capacity**200 kg (2 persons)
External use200 kg (1 person)
Basket size.....0.90 x 0.75 m

 **① Overall length**2.95 m
② Overall width0.99 m
③ Overall height1.99 m
④ Ground clearance10 cm
Turning radius :
⑤ Inside0.49 m
⑥ Outside1.98 m

 **Turret rotation**350°
Jib tilting140°

 **Traction battery**24 V/250 Ah (C5)
Integrated charger.....24V/30 Ah

 **Drive speed**4.5 km/h
Working speed0.65 km/h

 **Gradeability**25%
Max. slope accepted2° or 3.5%

 **Weight**2250 kg

Standard equipment:

- Lifting brackets
- Horn
- Hour meter
- Battery charge indicator
- Emergency manual descent
- Wheels with non-marking tyres
- Integrated charger

Options:

- Air predisposal
- Water predisposal
- Provision of 230 V
- 230 V socket with differential circuit-breaker
- Flashing light
- Working lights
- Biodegradable oil
- Oil for cold weather



This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice.
The MANITOU models presented in this brochure can be supplied complete with optional equipment attachments.



MANITOU BF SA

B.P. 249 - 44158 Ancenis Cedex - France
Tel. : 33 2 40 09 10 11 / Export Department Fax : 33 2 40 09 10 97
www.manitou.com

700432EN-A - 04/09

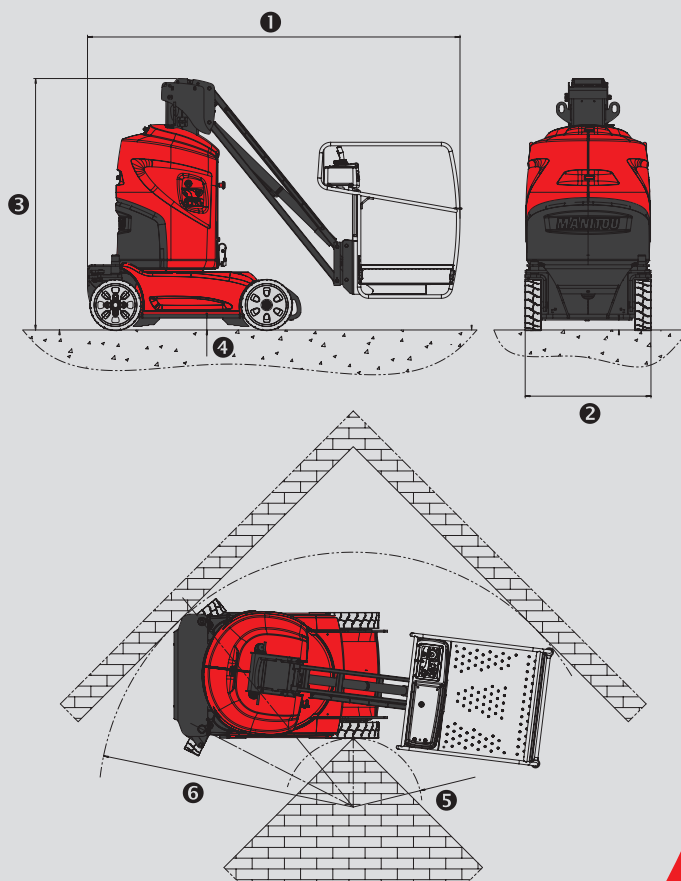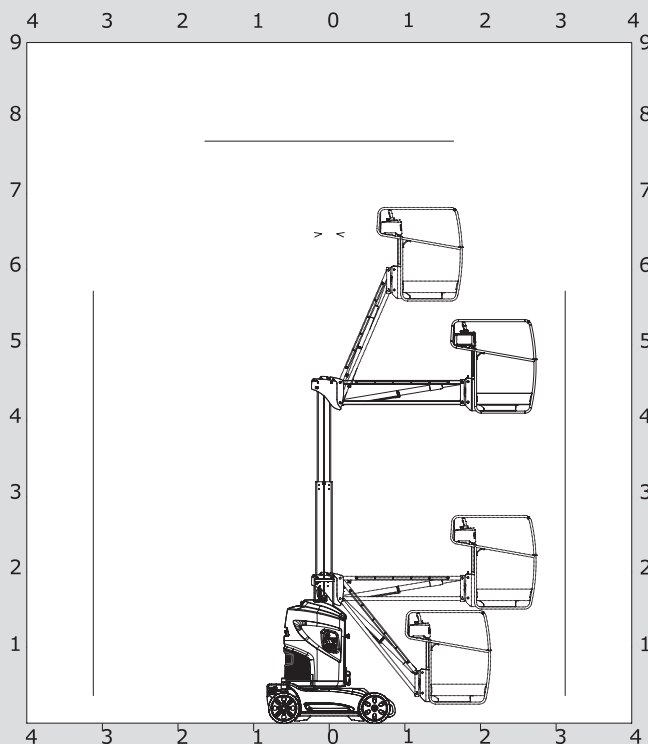

MANITOU